


## RES

### Redukcje ekscentryczne (kształtki doczołowe)

Kształtki doczołowe PE-HD do montażu z mufami elektrooporowymi AM.

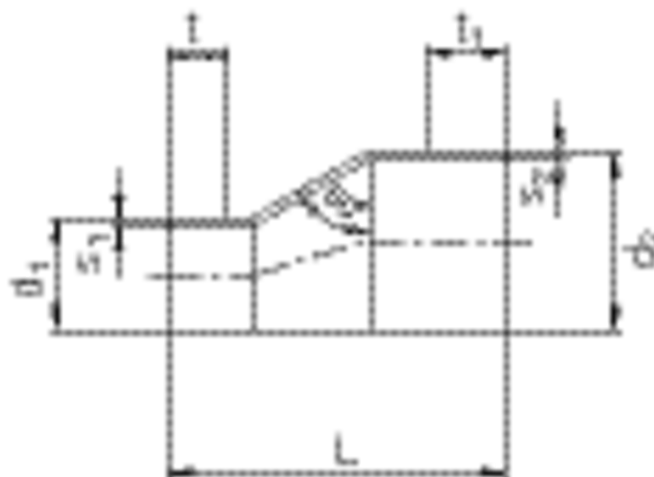

PE 80/PE 100

Maksymalne ciśnieni robocze 0.5 bar zgodnie z DIN EN 1610

| Indeks | d <sub>1</sub> | d <sub>2</sub> | Opak. | L   | t   | t <sub>1</sub> | product.detail.attribute.s1Small | product.detail.attribute.s2Small | Masa<br>kg/szt. |
|--------|----------------|----------------|-------|-----|-----|----------------|----------------------------------|----------------------------------|-----------------|
| 681018 | 110            | 125            | 1     | 264 | 85  | 85             | 6,6                              | 7,4                              | 1,000           |
| 681801 | 110            | 160            | 1     | 310 | 90  | 95             | 6,6                              | 9,5                              | 1,200           |
| 681802 | 160            | 225            | 1     | 404 | 100 | 150            | 9,5                              | 13,4                             | 2,530           |
| 681804 | 200            | 225            | 1     | 440 | 100 | 250            | 11,9                             | 12,8                             | 4,100           |
| 681810 | 225            | 280            | 1     | 540 | 150 | 250            | 13,4                             | 16,6                             | 5,460           |